
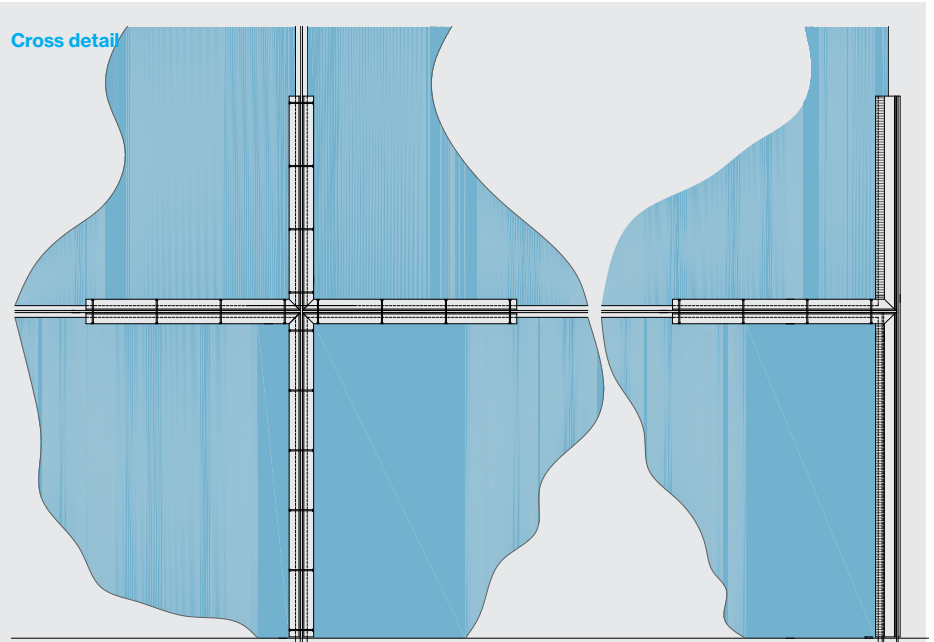
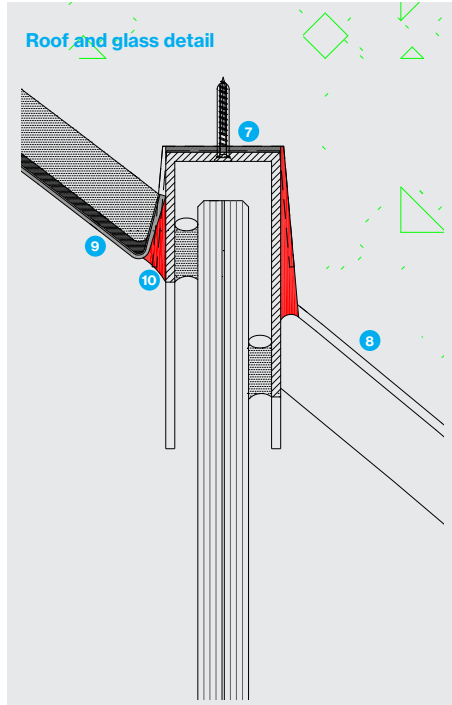


Key

- 1 Routed rebate, painted black
- 2 Jarrah timber fixed to galvanised steel posts with M8 bolts
- 3 16mm steel plate
- 4 Routed wire way
- 5 Frameless glass secured by silicone and backing cord
- 6 Galvanised mild steel post
- 7 Custom aluminium compensating channel fixed with Sikadur 32 epoxy, and by screw fixing while epoxy cures
- 8 Reinforced concrete shell soft skimmed with a fairing compound and finished with a sound-absorbing cellulose-based coating
- 9 Custom pigmented waterproofing membrane on 20mm-thick smooth substrate by Sika
- 10 Grey-coloured silicone sealant

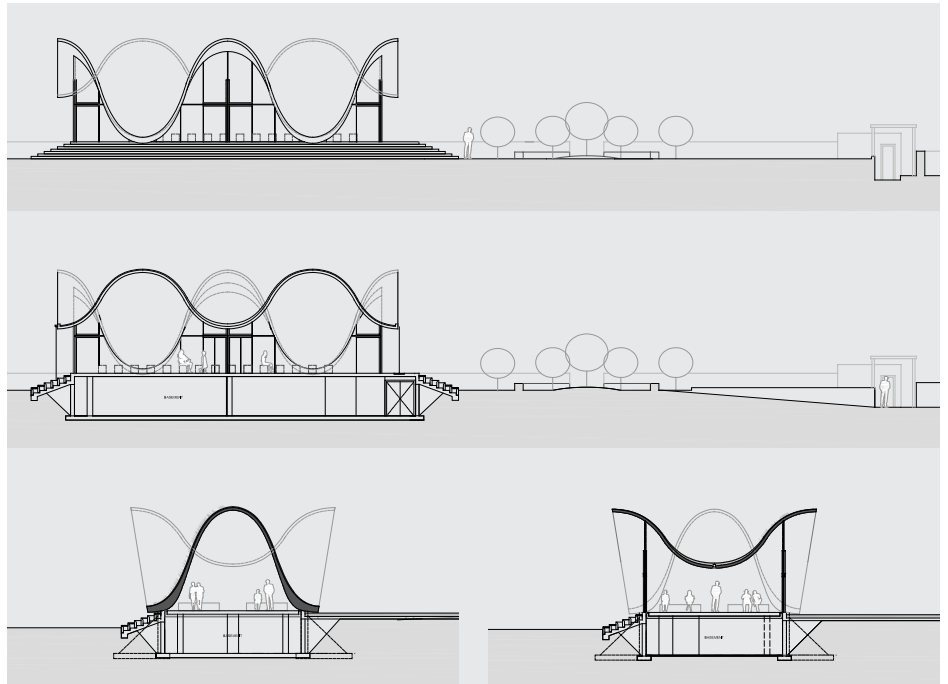

Top right

Long and cross sections. The chapel is 20 metres long and 12 metres wide and sits on a plinth above a basement which accommodates plant and store rooms for the chapel benches.

Above

Detail of glass junction with the roof.

Right

Detail of crucifix glazing frames in the central bays and at the corners.

